



DESTINY

www.destinyinc.eu

Classic
collection

Beyond Boundaries



Impressive
luxury

for your dream spaces

About

Our Floors

Our floors truly dares to say no formaldehyde, owing to the properties which make it waterproof, wear-resistant and silent. It is a disruptive innovation in the flooring industry, which has perfectly synchronized designs in the whole world with beautiful visual effects. We assure that this perfect flooring option will be a popular choice in the flooring market.

A versatile wood and stone range fascinates with its outstanding appearance and cutting edge designs! Not just smart looks, these floors are durable and highly resistant to wear and tear. It doesn't crack or form indentations with proper care and maintenance. The functionality of these luxury vinyl flooring is truly captivating and will surely get you floored with its superior features and in turn enhance your lifestyle!




Vital details captured in

premium surfaces

About

SPC Flooring

SPC rigid core flooring combines the strength of stone and the beauty of wood; an all for one solution for your home decoration. SPC flooring is constructed by UV coating, Wear layer, SPC print layer, SPC core and Balanced layer. For the backing, EVA, IXPE foam or Cork wood are available as options. Its advantages include good dimensional stability, high peel strength, almost no noise when walking, no warping, no distortion, 100% waterproof, heat and sound insulation, eco-friendly rigid floor and zero harmful emissions.

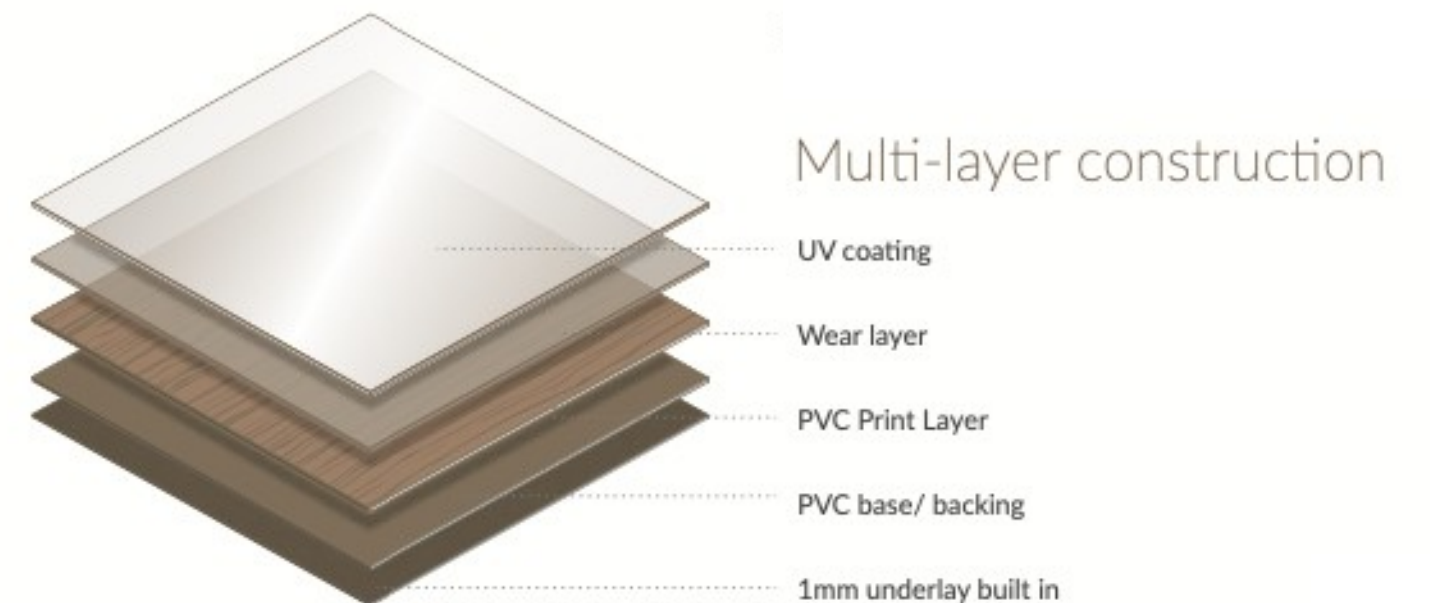

The unique features of SPC flooring are enumerated as under:

ECO-FRIENDLY

SPC flooring is mainly made with calcium powder, resin and a kind of stabilizer, which is 100% environmental protection floor without any hazardous substance, like heavy metal or formaldehyde. It is stone plastic composite, so it's formaldehyde free.




SPEED OF INSTALLATION

Adopting a quick locking system, with quick installation, save time and cost without glue. Tight and even interlock technology avoids crash of edges and water leakage; it's an ideal choice for places requiring high ensemble effect. Additional benefit is it installs about 40% faster than traditional glue.




WATERPROOF

SPC flooring contains vinyl resin, it has no appetency with water, and mildew will not occur due to high humidity. As it is water resistant, it is an ideal choice for residential use and can be used in bathrooms, kitchens, basement and laundry rooms.

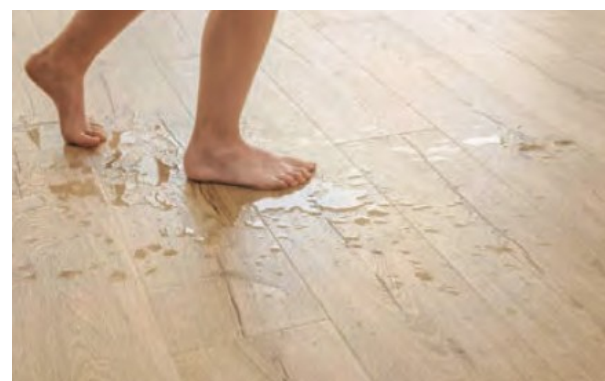

ANTI-SKIDDING

The fine finish of our floors with anti-slipping, safe and sturdy layering makes it the most sought after material. Anti-skid vitrified tiles last longer than other ceramic tiles due to their thickness and high resistance to water and stains. Sturdy and durable, the appearance remains intact over a period of time!

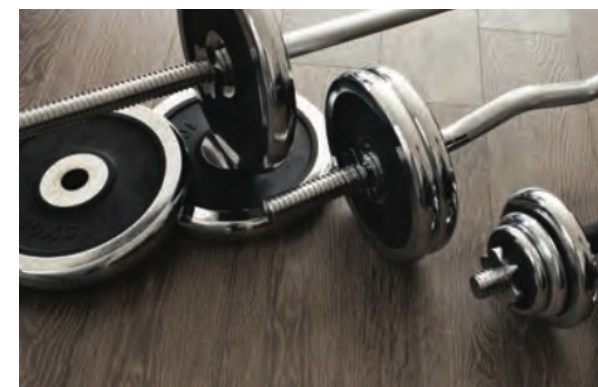

STABILITY AND DURABILITY

The limestone core of SPC flooring has a higher density than the wood-like core of WPC flooring. This higher density is responsible for dimensional stability and protecting the floor from damage caused by temperature variations. This feature is also responsible for a greater resistance to scratches and indentations that could be caused by heavy furniture.

VARIETY OF DESIGNS

With thousands of color patterns, wooden, stone & carpet design, it is suitable for different application areas.



FEATURES

FEATURES & BENEFITS



Lower Thickness & Weight



Extra Wild Planks



Impact Resistances



Easy to Clean Floor



Green Product



Dust free Installation



Flame Resistant



Scratch Resistant



Termite Resistant



Water Proof



Recyclable



Weather Proof



Stain Free



Easy to Carry



Modular



Glue Free



Less Dead Weight



Quick Installation



Mix & Match



Hassle Free Logistics

Embossed in Register (EIR):

The extremely realistic appearance of our luxury vinyl flooring is something we're very proud of. We are able to mimic the appearance and texture of beautiful natural wood and stone due to our innovative, EIR (Embossed-in-Register) technology, providing unparalleled realism and natural beauty that makes your flooring stand out. Enjoy the classic allure of hardwood, timeless marble and travertine, and top quality stone and slate for a fraction of the cost.

If you run your hand over the flooring, you'll notice something remarkable. You feel fine indentations that match the underlying photograph of a wood plank, similar to the grain of a plank cut from a tree. The embossing that creates the indentations must align perfectly with the image of the wood or stone in order to achieve this extremely realistic 3-dimensional appearance. This precise alignment is known as embossed-in-register (EIR). The embossed physical grain of the wear layer is married to the image film.

Every plank's unique, three-dimensional wood grain surface makes us the best choice for your home or business. You've got to feel it to believe it.



ACOUSTICAL ATTRIBUTES



AFFORDABLE



KID FRIENDLY



HYGIENIC



RESILIENT




DIVERSE DESIGNS



DURABLE



LOW MAINTENANCE



PET FRIENDLY



WATERPROOF

INDEX

About SPC Flooring	05
The unique features	06
Features	08
Embossed in Register	09
Wooden Wonder	13
Stylish Stone	73
Floor Finishes	90
Performance	92
Product Application/Structure	93



DESTINY

Behold the
beauty of uncut

nature

WOODEN WONDER



Marvin Natura



Marvin Natura

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9'x 60", 9'x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light





Dark Natura



Dark Natura

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Almeria



Almeria

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Almeria Ash



Almeria Ash

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Coloroba Light



Coloroba Light

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Coloroba Dark



Coloroba Dark

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Aged Fern



Aged Fern

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Classic Fern



Classic Fern

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Smoked Fern



Smoked Fern

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Accura Wenge



Accura Wenge

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Accura Grit



Accura Grit

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Natural Timber



Natural Timber

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Regal Timber



Regal Timber

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Acacia Timber



Acacia Timber

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light





Alba Oakley



Alba Oakley

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light





Alda Oakley



Alda Oakley

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Millennial Bark



Millennial Bark

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Matured Bark



Matured Bark

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Brown Brisk



Brown Brisk

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Grey Brisk



Grey Brisk

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Donna Grove



Donna Grove

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Esta Grove



Esta Grove

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light





Stripped Pinewood



Stripped Pinewood

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Classic Plank



Classic Plank

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Rio Redwood



Rio Redwood

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Snowy Rigato



Snowy Rigato

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Muscat Mark



Muscat Mark

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Choco Trench



Choco Trench

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Weathered Beech



Weathered Beech

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x36", 7.25"x48", 9"x60", 9"x72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Witness
the organic
grandeur

STYLISH STONE



Statuario



Statuario

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Grey Pietra




Grey Pietra

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Galaxy Onyx

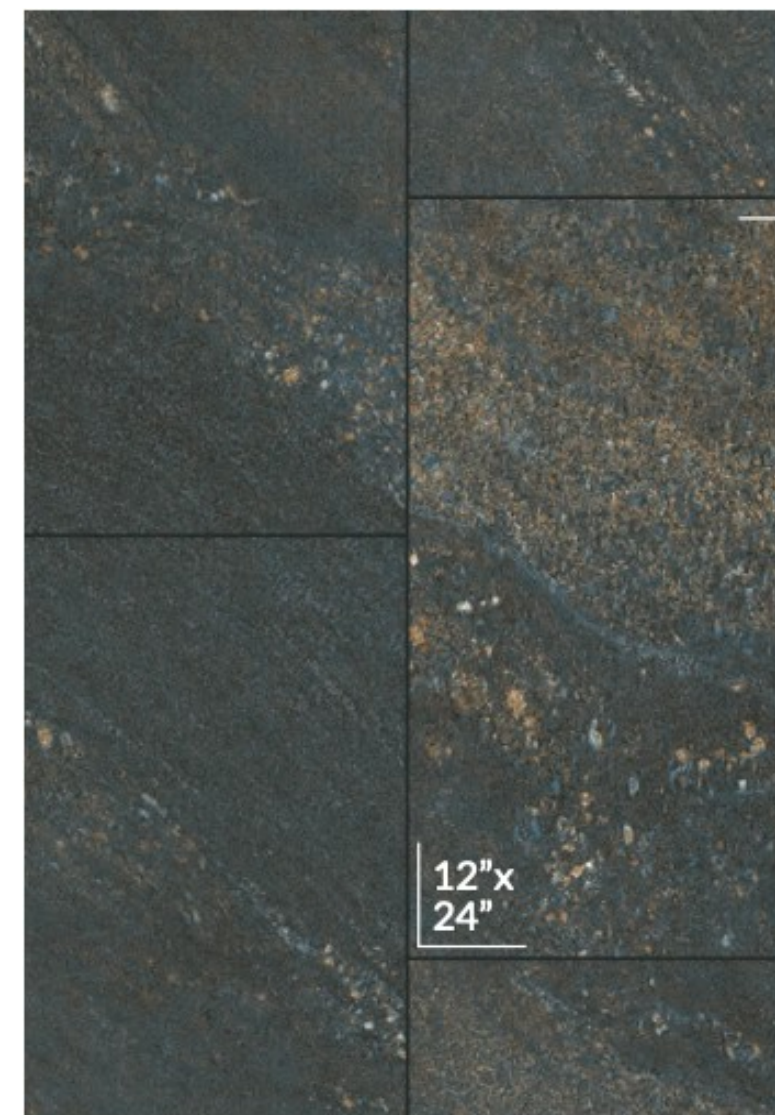

Galaxy Onyx

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Travertine Crema



Travertine Crema

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Travertine Grey




Travertine Grey

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Armani Brown

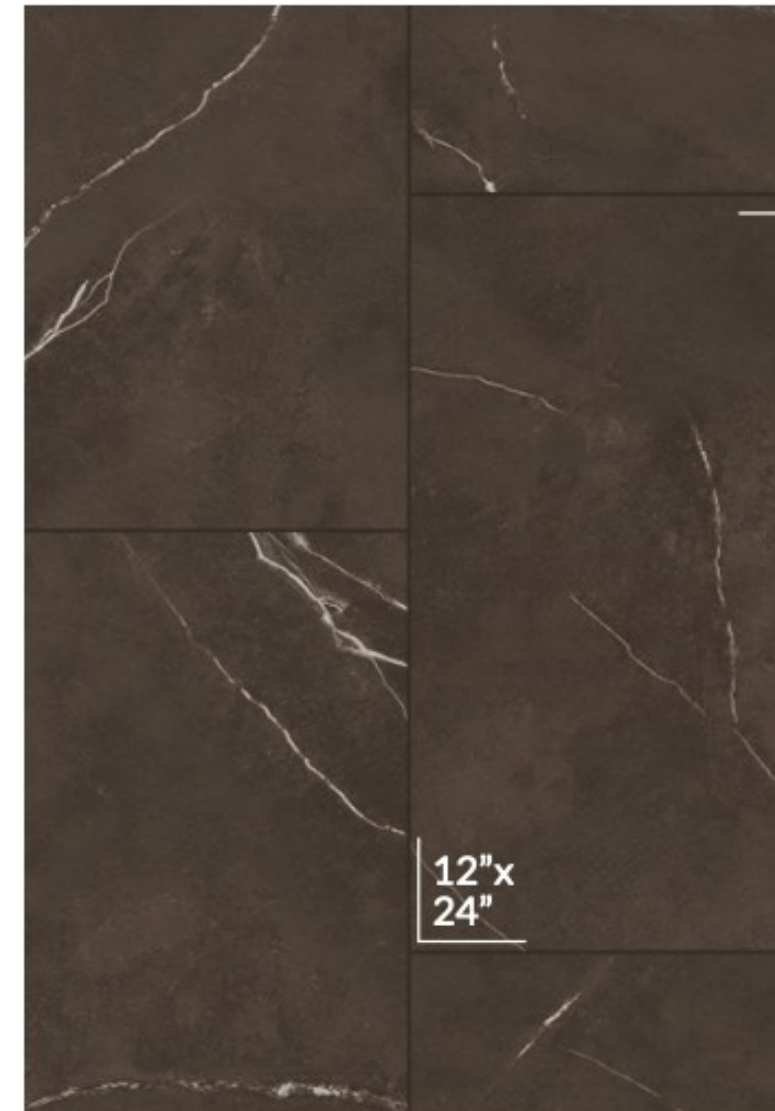

12"x
24"


Armani Brown

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Armani Grey

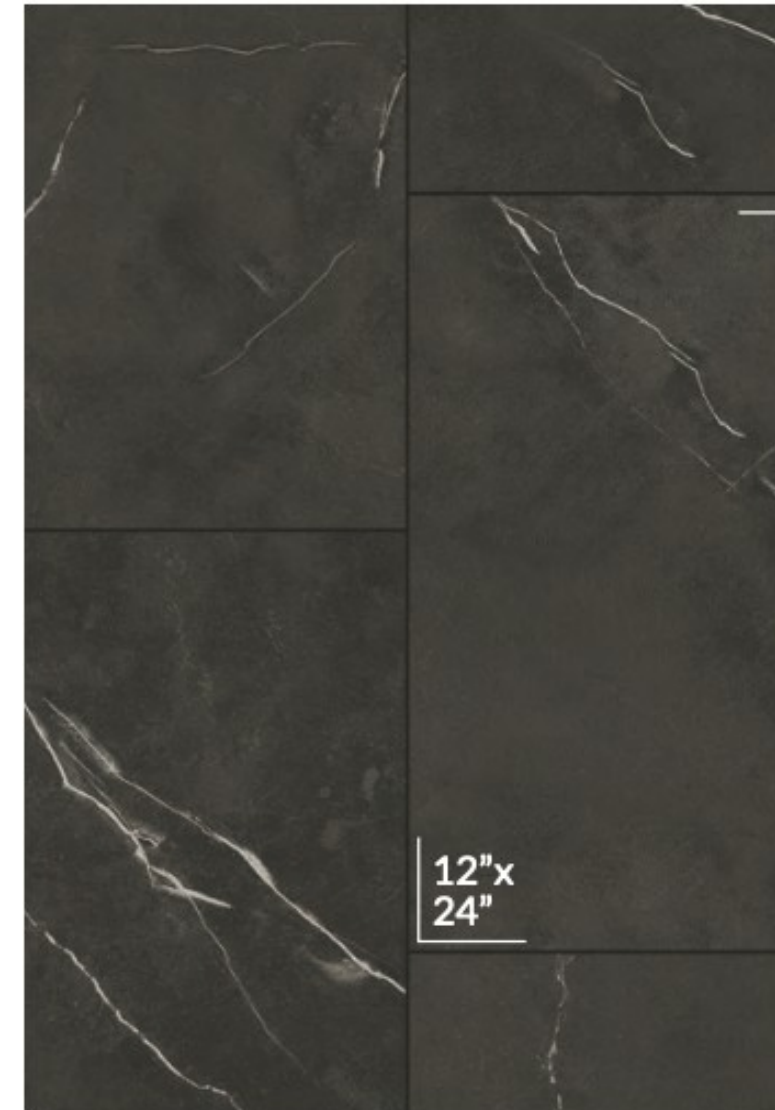

Armani Grey


PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark





Armani White

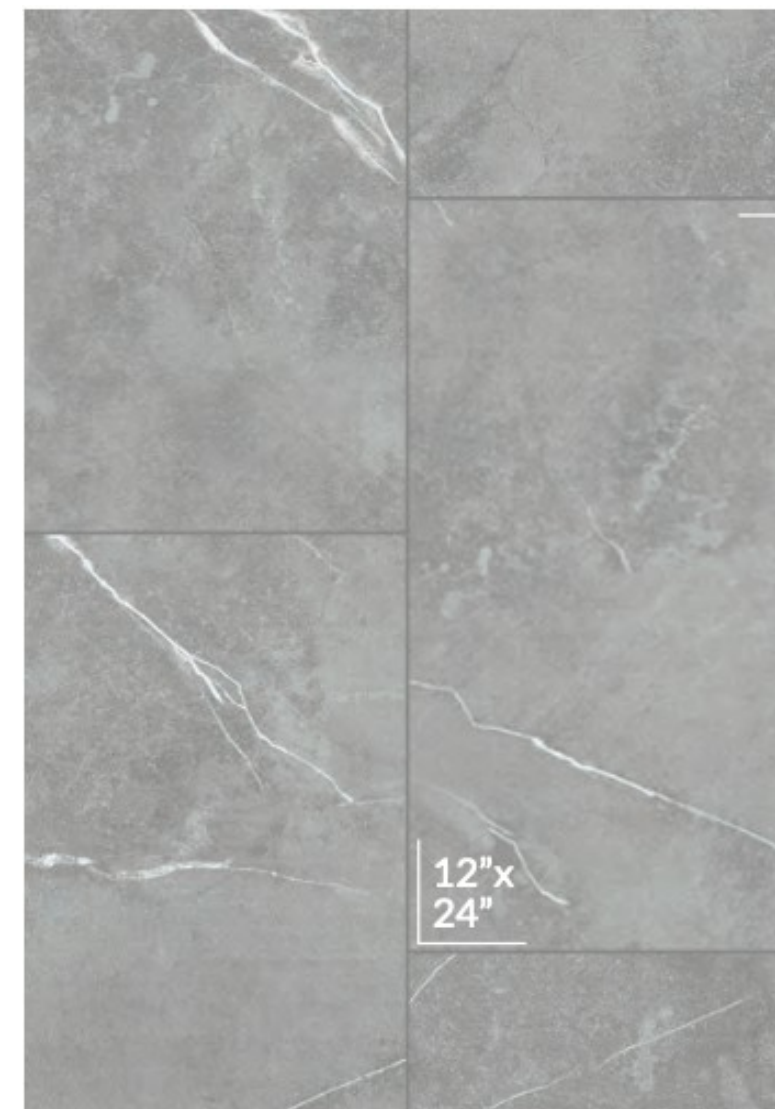

Armani White

PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm (12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12"x24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





The Floor Finishes



CLASSIC
WOOD

MODERN
OAK

NATURAL STONE
FINISH

ROUGH HAND
SCRAPED









PERFORMANCE

Item	Unit	Test Methods	Spec	DESTINY SPC
Thickness	mm	ASTM F 386	±0.005"(0.13mm)	±0.005"(0.13mm)
Size	Width	ASTM F 2055	177.8 ± 0.23	177.8 ± 0.23
	Length		1219.2 ± 1.58	1219.2 ± 1.58
Squareness	mm	ASTM F 2055	Max. 0.01"(0.254mm)	≤ 0.2
Gloss level	-	60° Gloss Meter		5 - 8
Size	Width	ASTM F 2199-09	≤ 0.002"(0.165%)	≤ 0.1%
	Length		≤ 0.002"(0.165%)	≤ 0.1%
Size	23°C			≤ 0.5mm
	-10°C x 2hr			≤ 0.5mm
Core Density	-			1.95 ± 0.05
Contraction (-10°C, 2hr)	Width	-10°C x 2hr		≤ 0.2%
	Length			≤ 0.2%
Expansion (50°C, 4hr)	Width	50°C x 4hr		≤ 0.2%
	Length			≤ 0.2%
Indentation	%	ASTM F 1914	≤ 8%	≤ 5%
Resistance to Chemicals		ASTM F 925 (Resistance to Chemicals)	No more than slight change in surface dulling, surface attack, or staining	No more than slight change in surface dulling, surface attack, or staining
IIC		ASTM F 492-09	≥ 50	≥ 52
Static Load Limit		ASTM F 970	0.005"(0.13mm)	0.005"(0.13mm)


PRODUCT APPLICATION







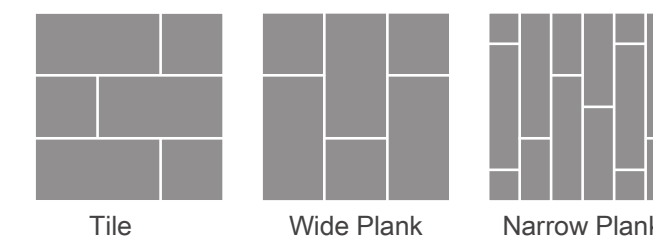


INSTALLATION OF THE PRODUCT

- Place the B plate on plate A inclined, right into the fillster locking, and then let it lay flat. 
- After laying it flat, place the B plate and C plate parallel to each other with spacing about 2-3 mm. 
- Lift up the plates A and B at the same time. (Note: They should be at a 45 degree angle to the ground.) 
- Push the B plate flat along the C plate direction, push until locked. 
- With the palm of your hands, flatten the plates A and B, but do not use force to press to the floor. 
- The floors should be smooth without slit after installation. If the floor are not smooth or have a slit, then they need to be lifted and locked at a 10 to 30 degree angle. After locking, the floor will be smooth automatically. 

PRODUCT STRUCTURE

Available in 3 styles



-  Waterproof core
-  Easy to cut
-  Hard wearing & durable
-  Foam backed
-  Slip resistant
-  Lighter to carry
-  Stable rigid PVC core
-  Reaction to fire tested
-  15 year domestic / 7 year commercial warranty